




# CITY HALL PARK | CONTEXT

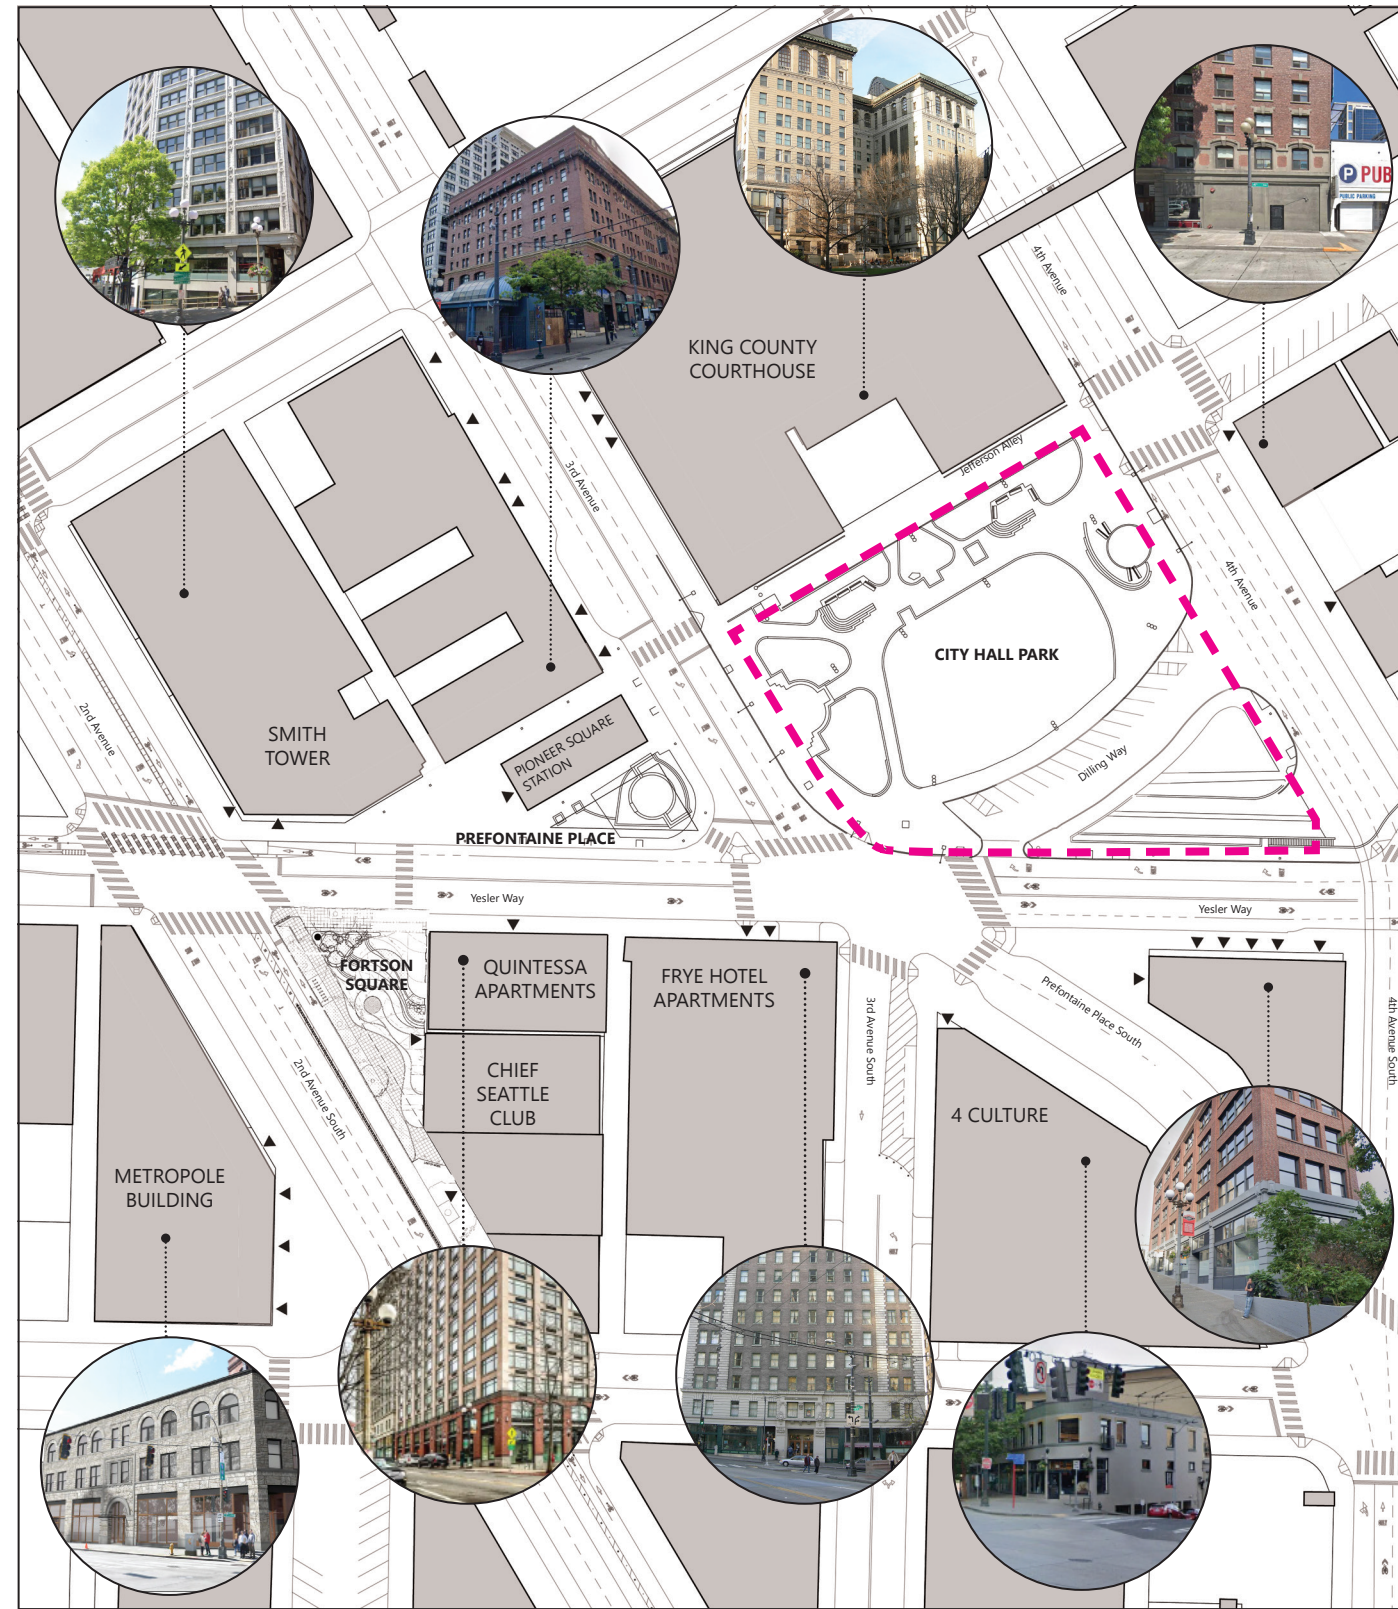

# CITY HALL PARK | CONTEXT

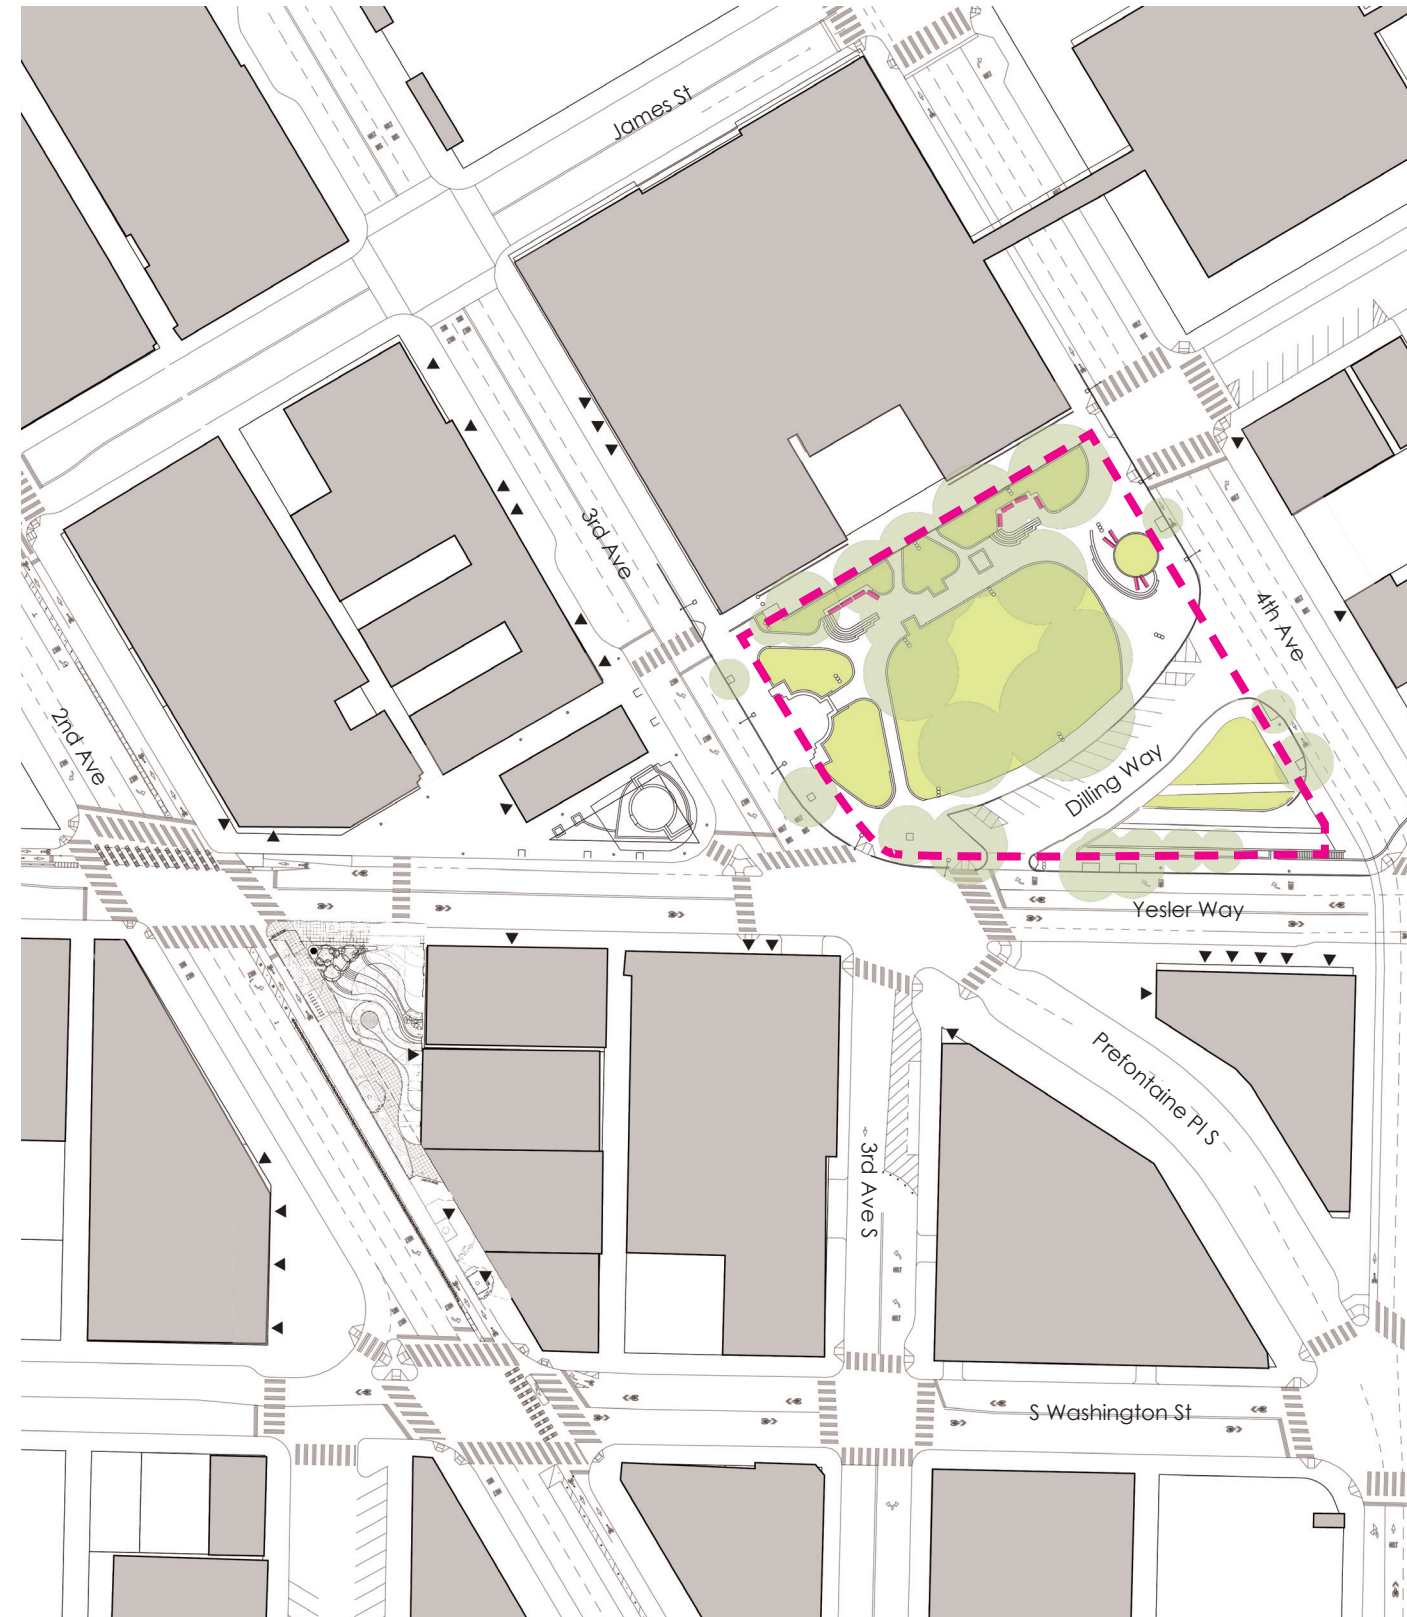

# CITY HALL PARK | PREVIOUS BENCH LOCATIONS

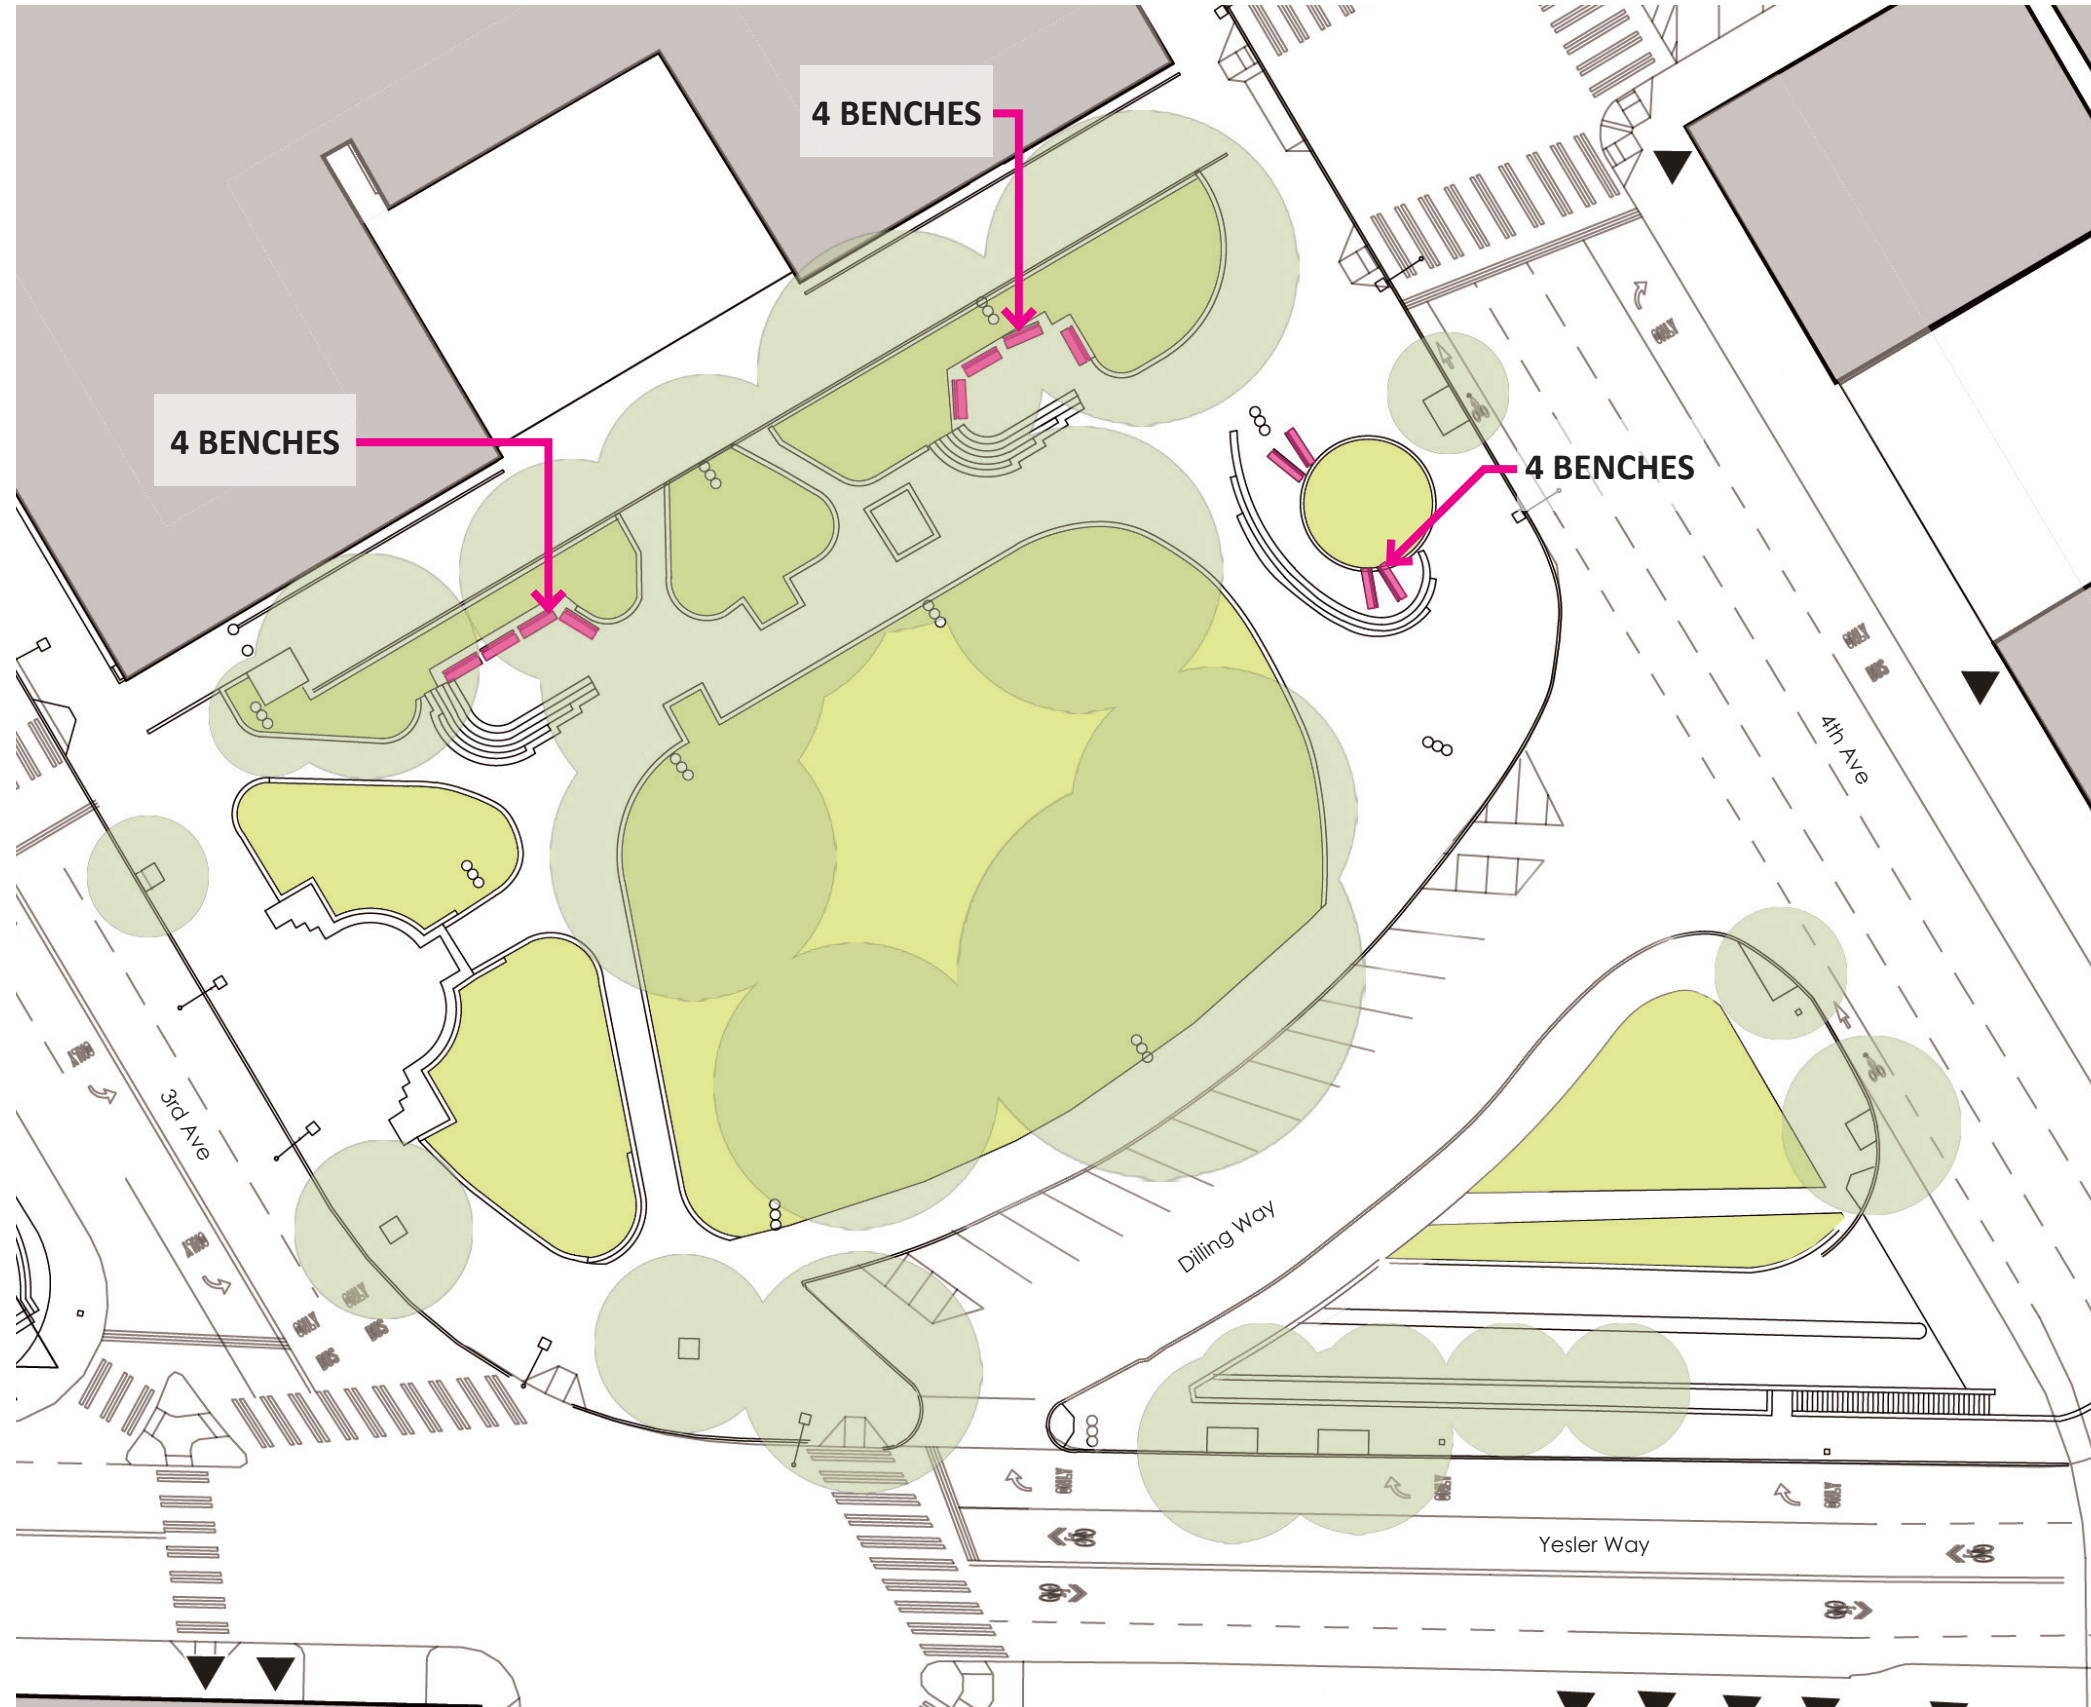


# EXISTING BENCHES

Issues with existing benches:

- difficult to maintain
- custom-made precast concrete bases are difficult and expensive to repair
- wood slats are easily vandalized



# CITY HALL PARK | EXISTING BENCH LOCATIONS

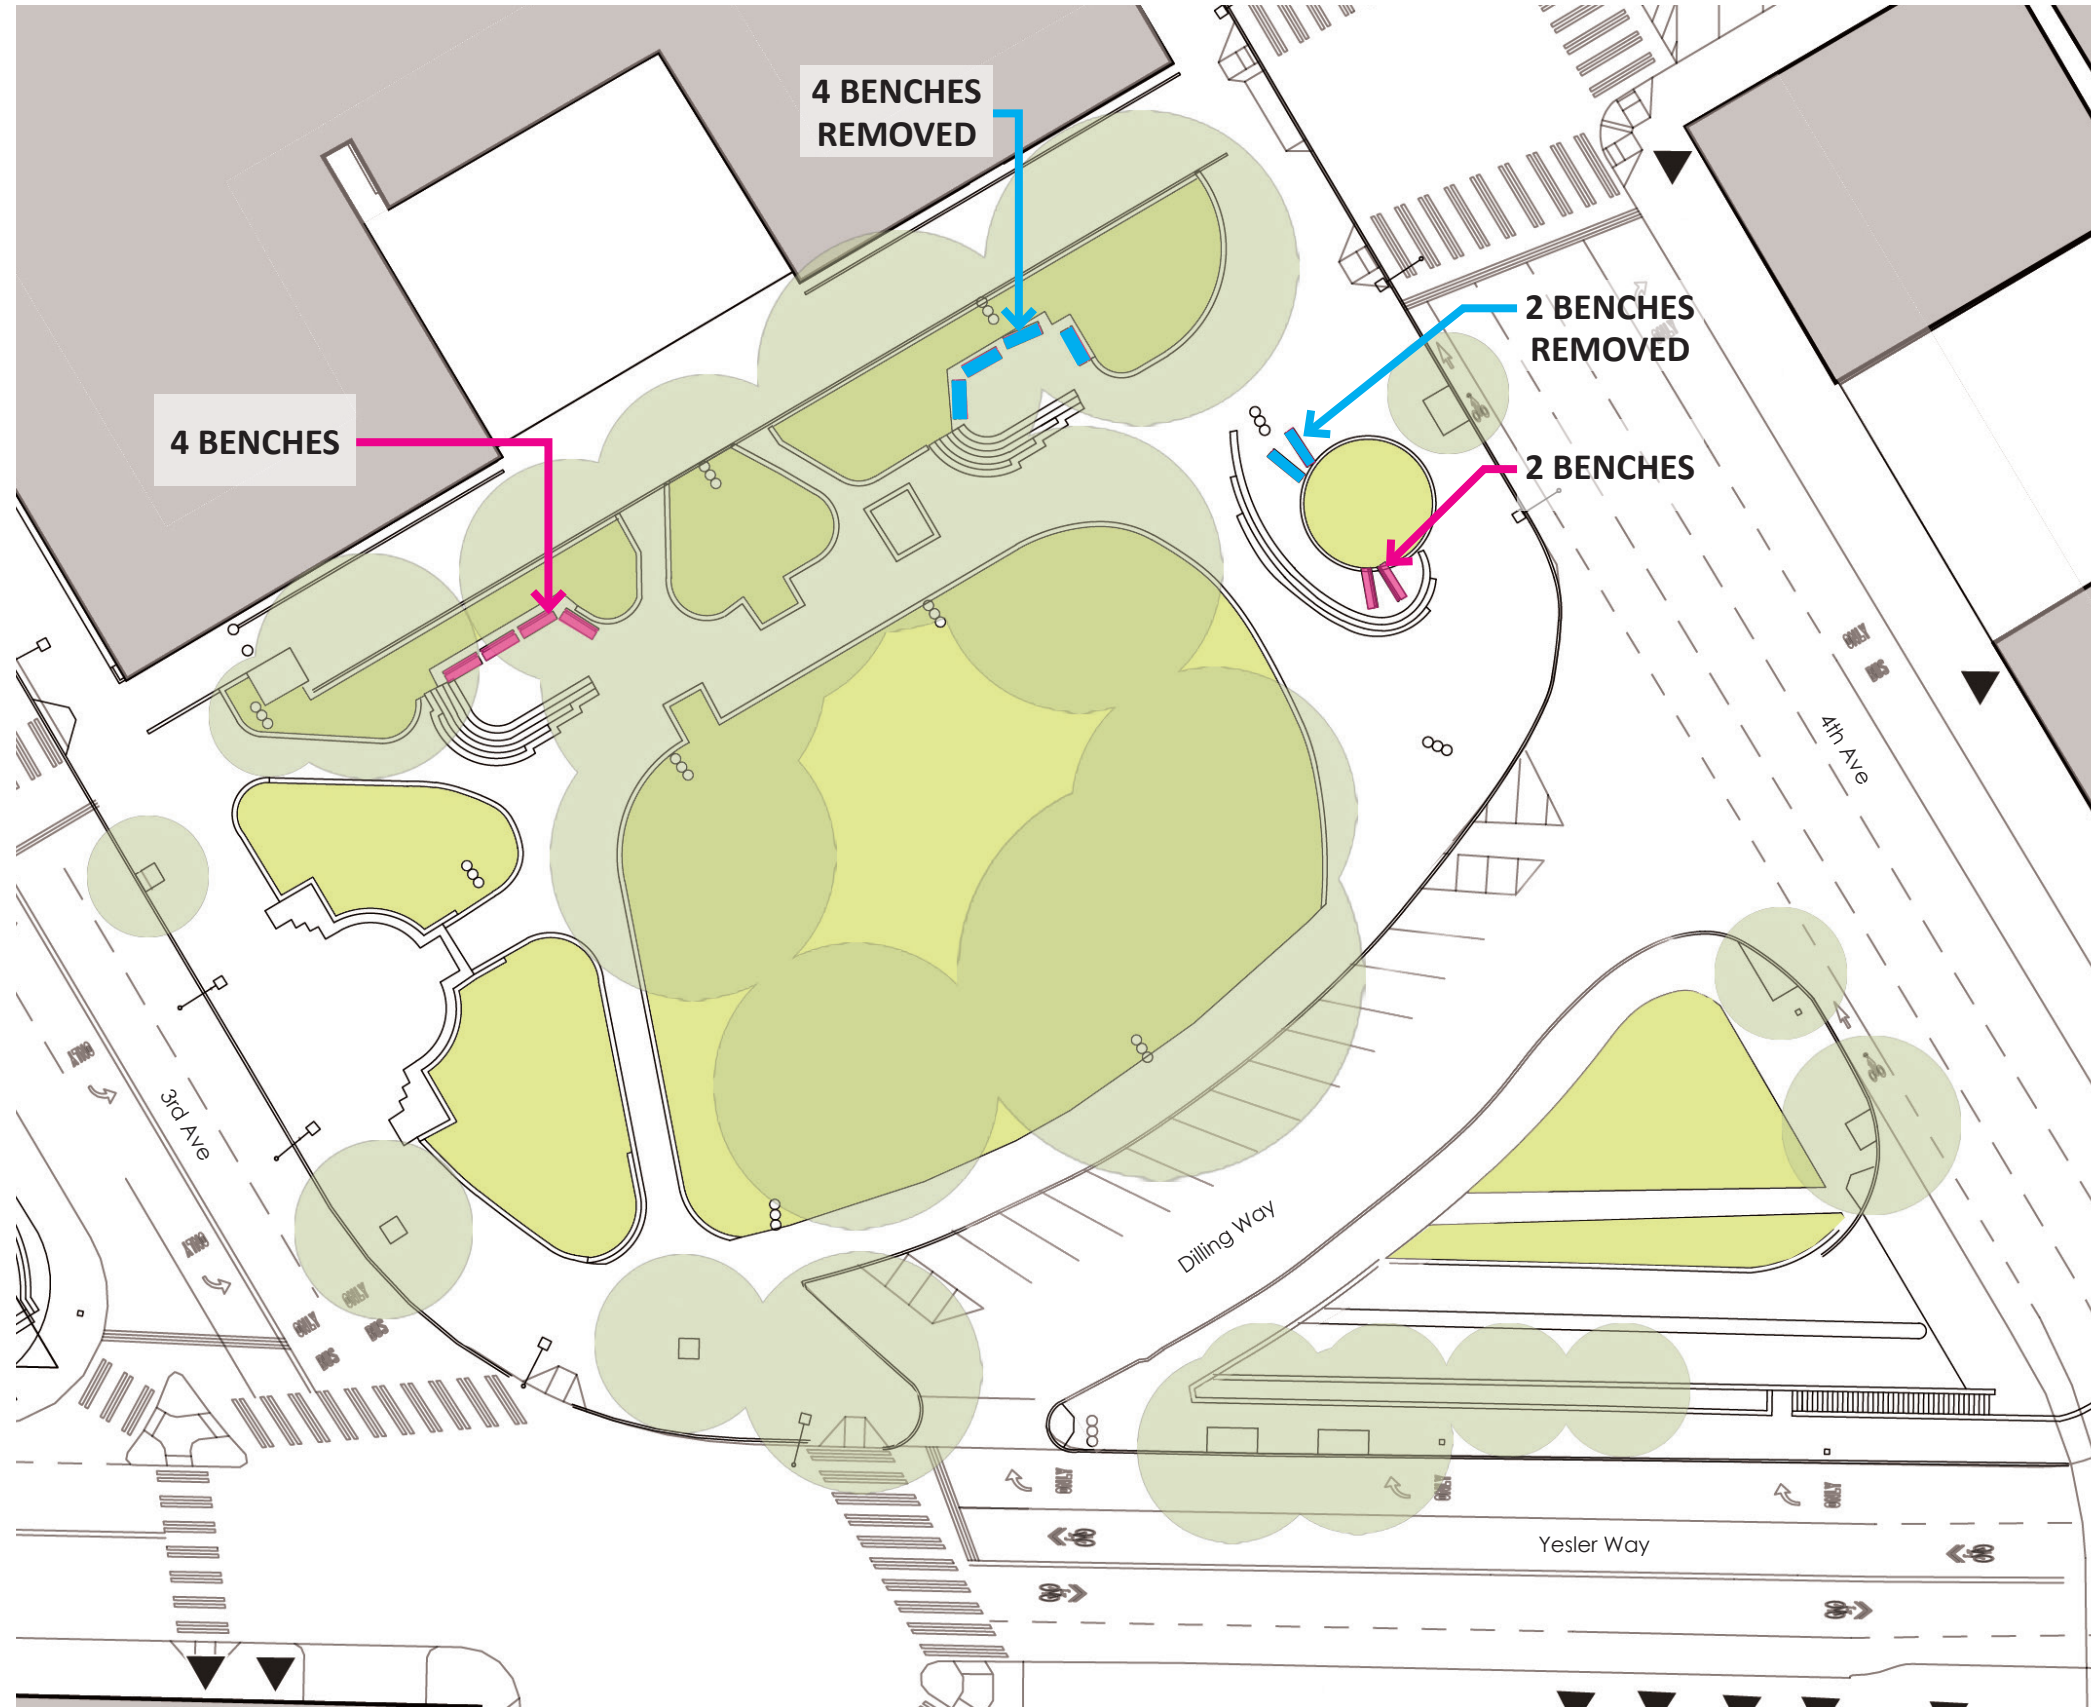

# PROPOSED NEW BENCH OPTIONS

Replacement bench criteria:

- all metal
- preferably black
- 6' length preferred
- easy to maintain



## Dumor - Bench 493

- cast aluminum frame, steel seat
- powdercoat black finish available
- available in 6' or 8' lengths
- optional center armrest available
- surface mount tabs
- Unit Pricing: \$1949
- Lead Time: 8 weeks

## Landscape Forms - Plainwell Bench

- cast aluminum frame, aluminum seat
- powdercoat black finish available
- available in 6' or 8' lengths
- optional center armrest available
- surface mount tabs
- Unit Pricing: \$2720 - \$3360
- Lead Time: 5-7 weeks


## Victor Stanley - RBF-28

- steel frame, steel seat
- powdercoat black finish available
- available in 4', 6' or 8' lengths
- optional center armrest available
- surface mount tabs
- Unit Pricing: \$1459 - \$1749
- Lead Time: 7-9 weeks

## Victor Stanley - Eva



- steel frame, steel slat
- powdercoat black finish available
- available in 4', 6' or 8' lengths
- optional center armrest available
- surface mount tabs
- Unit Pricing: \$1830 - \$2199
- Lead Time: 7-9 weeks

# CITY HALL PARK | PROPOSED BENCH LOCATIONS

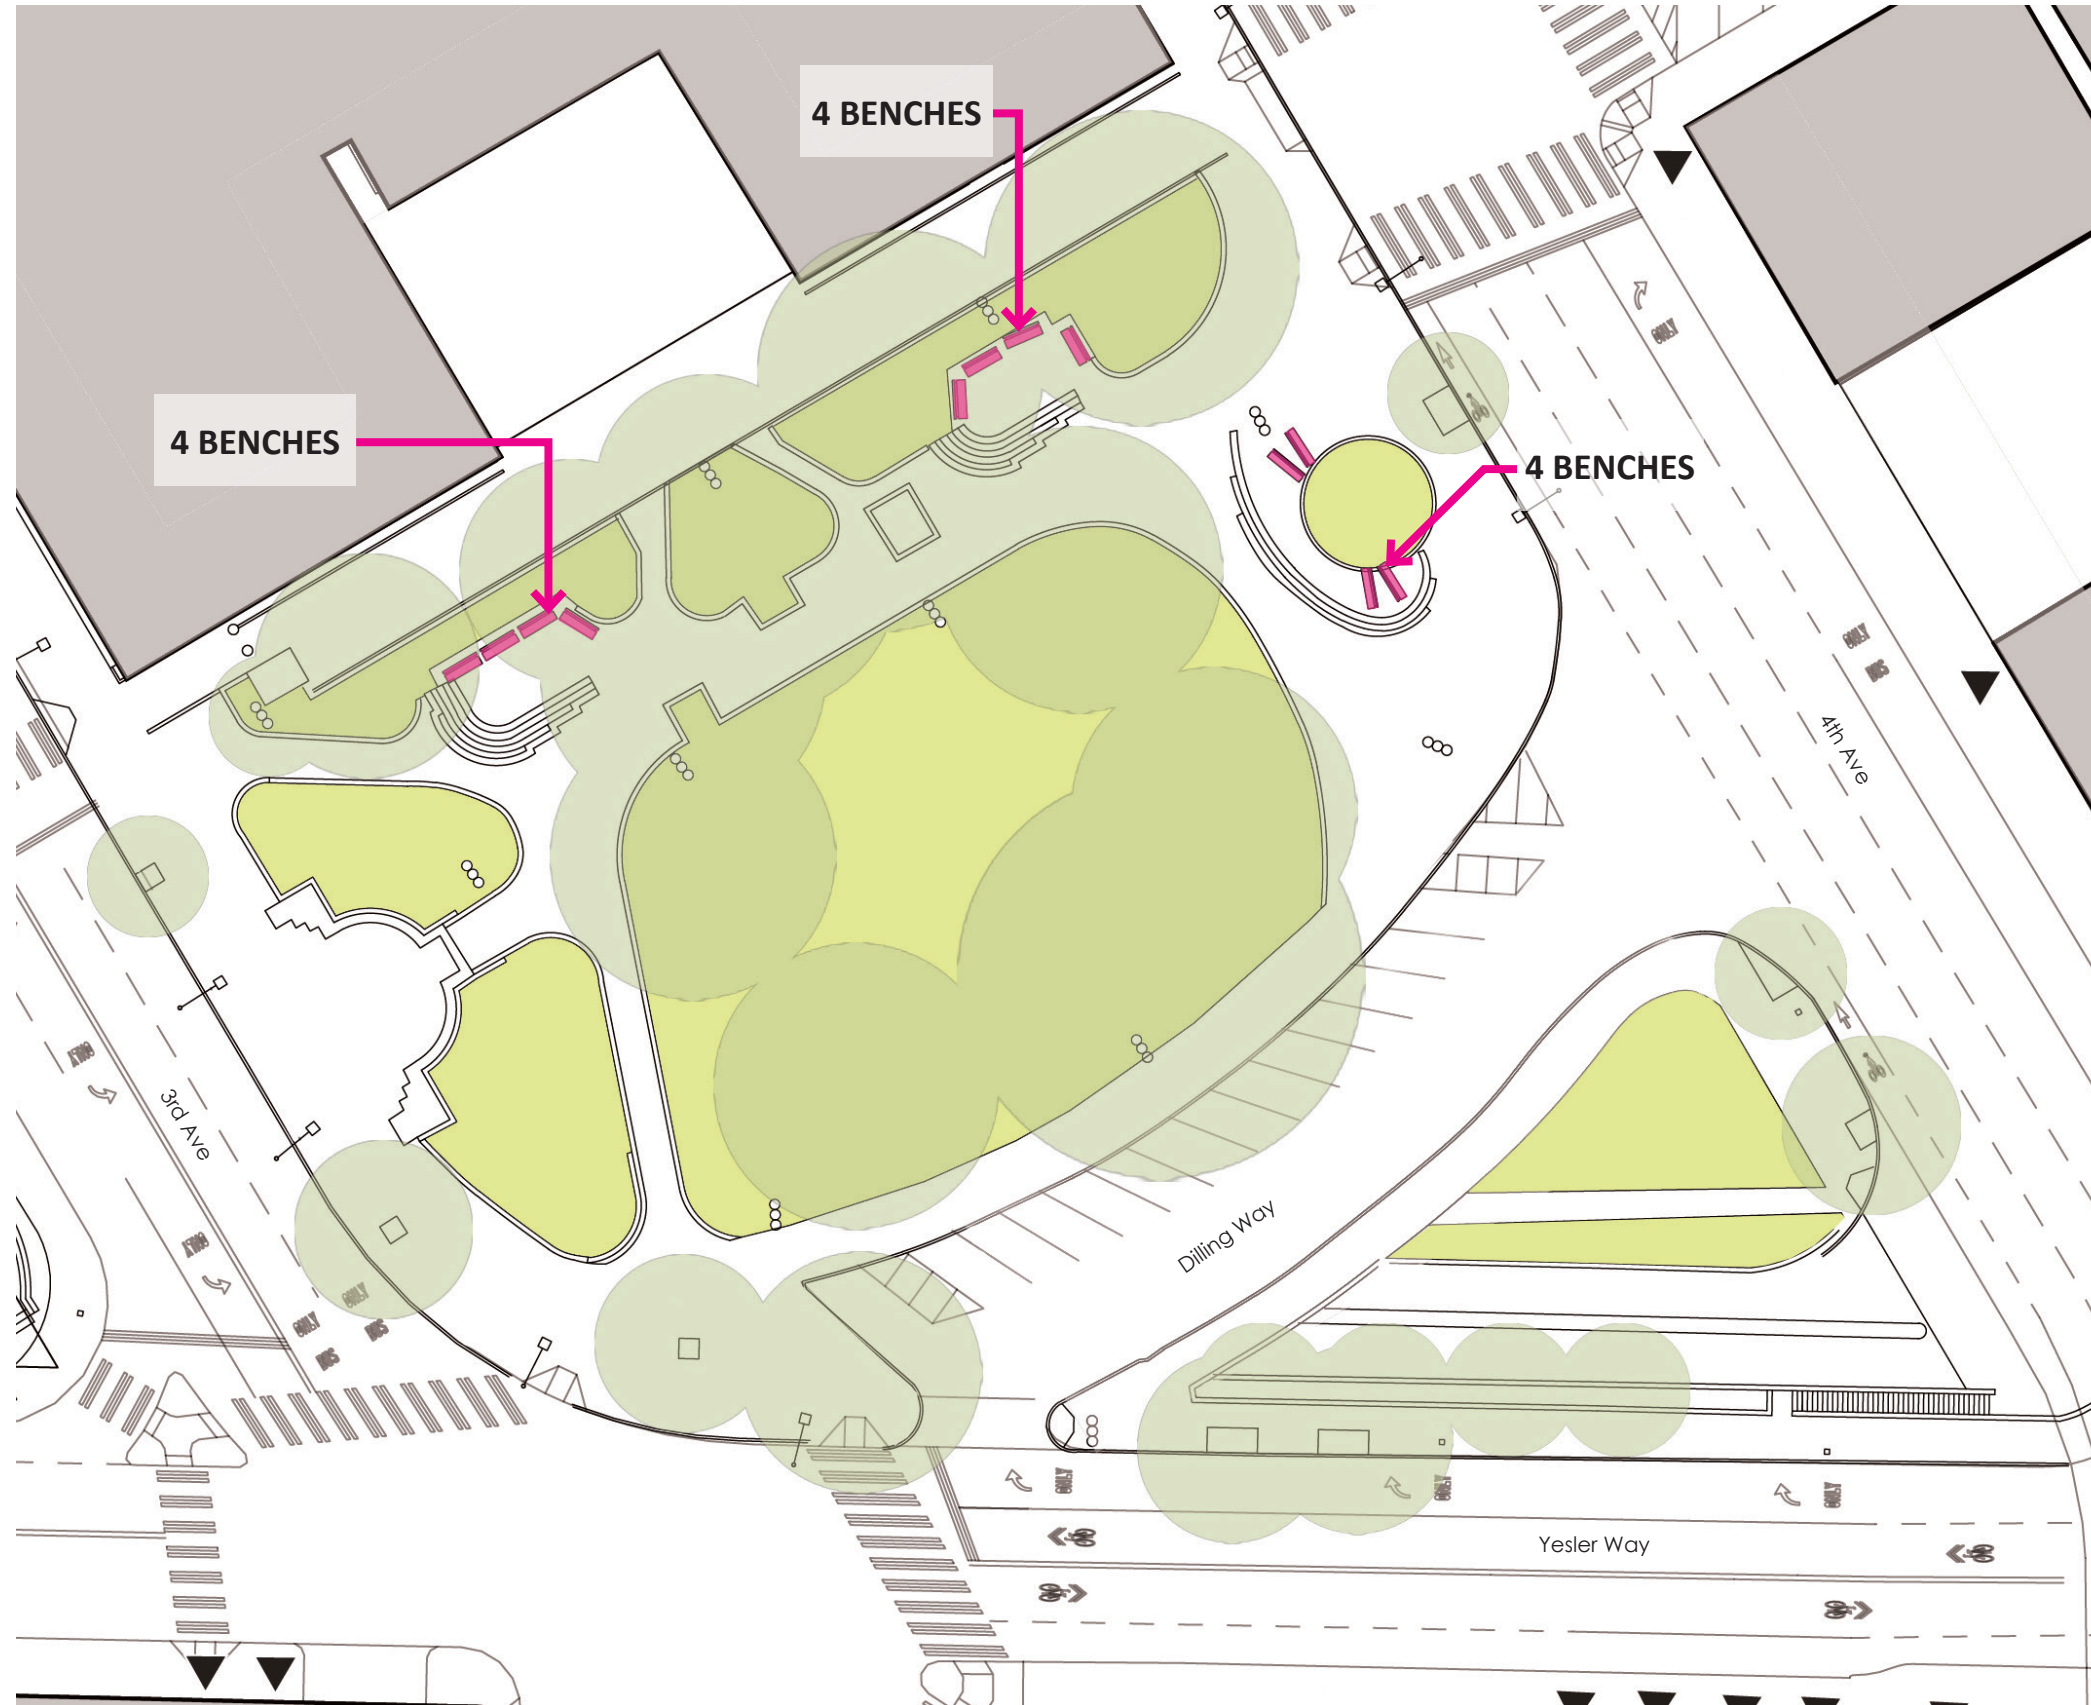

# APPENDIX | PRODUCT CUT SHEETS



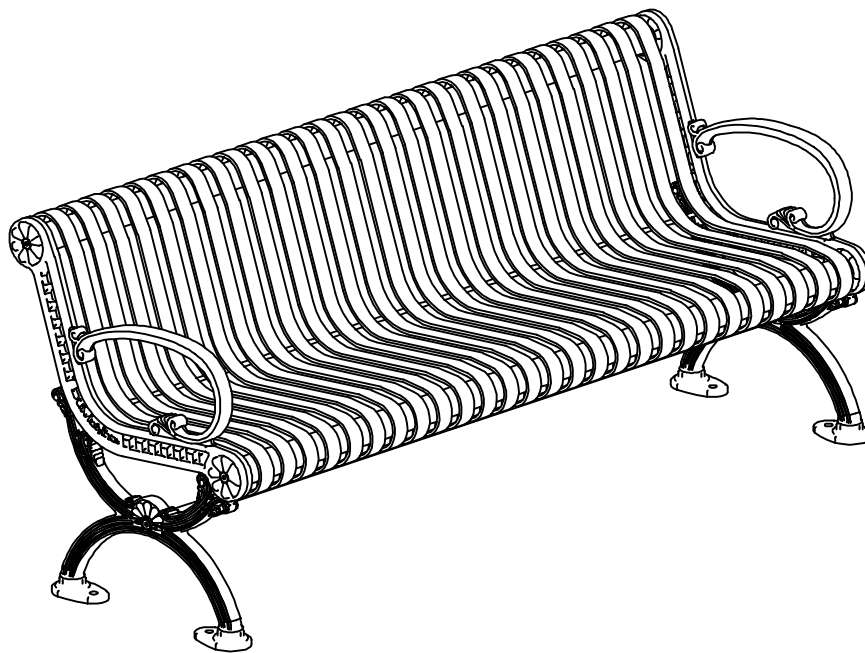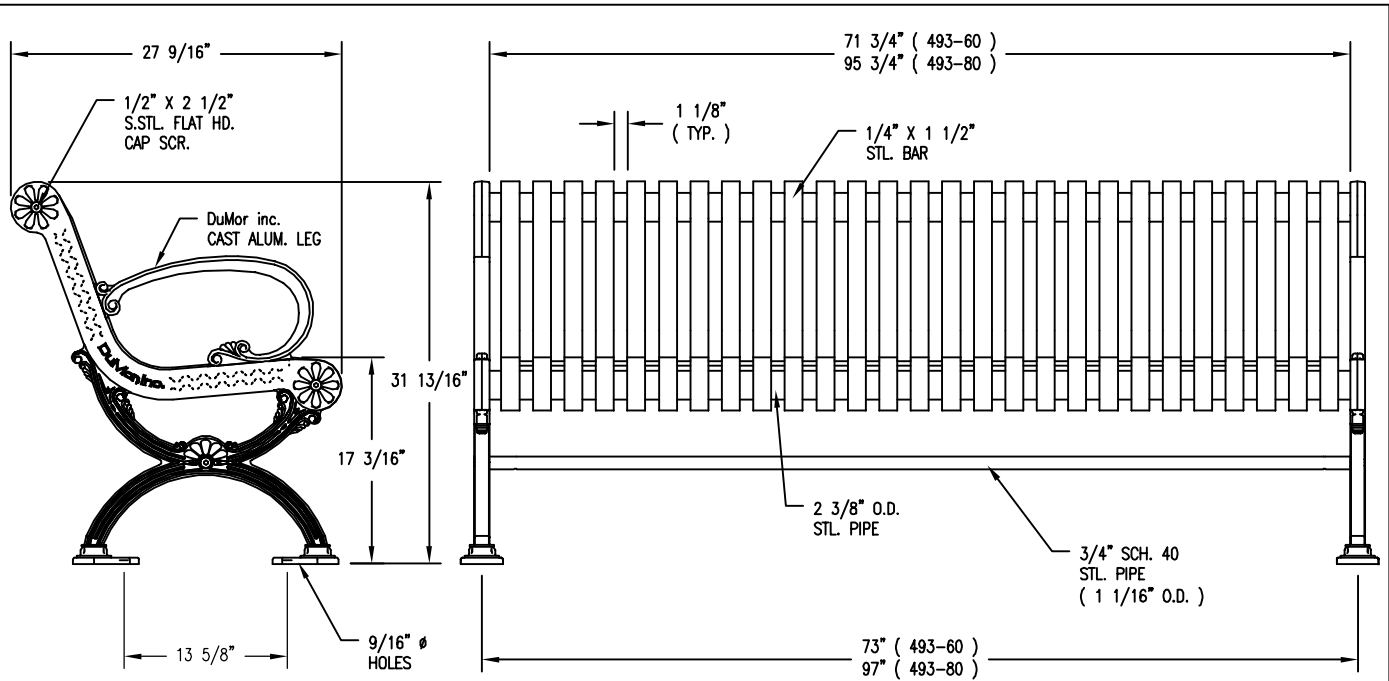

**NOTES**

- 1.) ALL STL. MEMBERS COATED W/ ZINC RICH EPOXY THEN FINISHED W/ POLYESTER POWDER COATING.
- 2.) 1/2" X 3 3/4" EXPANSION ANCHOR BOLTS PROVIDED.

**LENGTH OPTIONS**

- 6' BENCH
- 8' BENCH



BENCH


DATE DRAWN : 10/08/15  
 DRAWN BY : RDH  
 DATE REV. :  
 REV. BY :

REV.  
A



DRAWING NUMBER

493 SERIES

SHEET  
1 OF 2

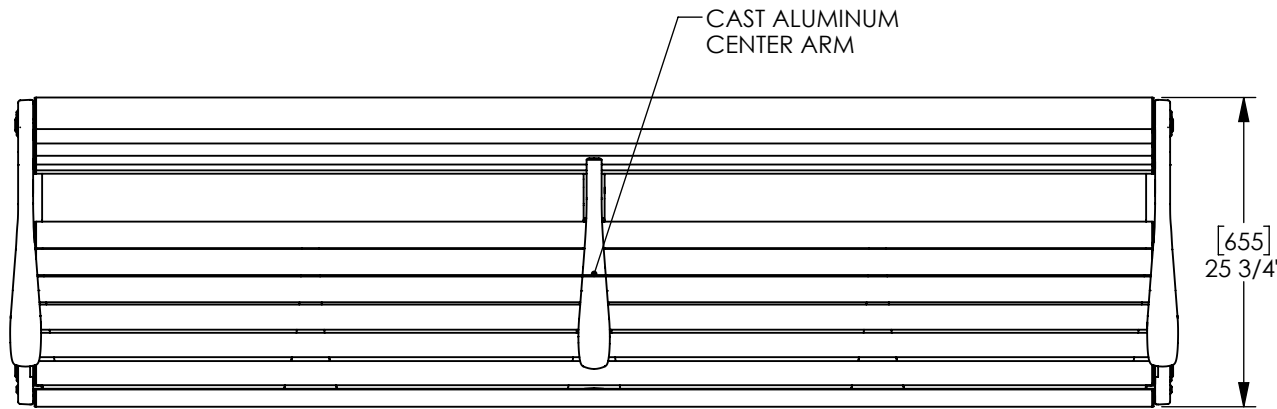

NOTE:  
FREESTANDING OR SURFACE MOUNT  
OPTIONS. CORROSION-RESISTANT  
ANCHORING HARDWARE SUPPLIED BY  
OTHERS. Ø13/32" HOLES WITH COUNTERBORE  
PROVIDED FOR SOCKET HEAD CAP SCREWS.



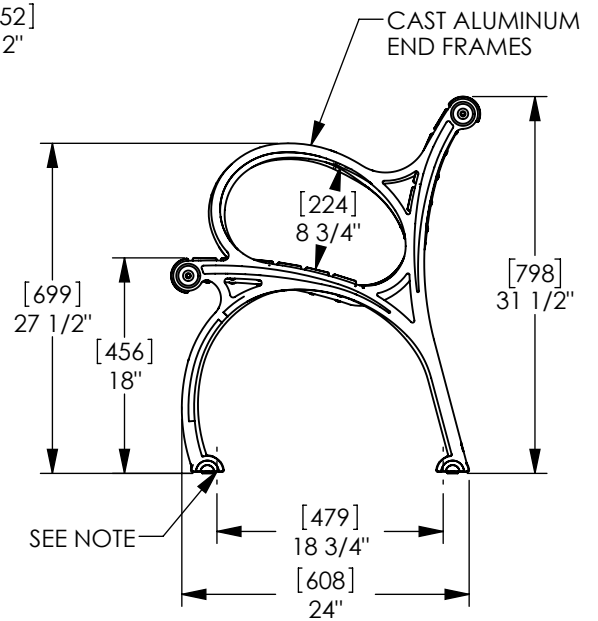
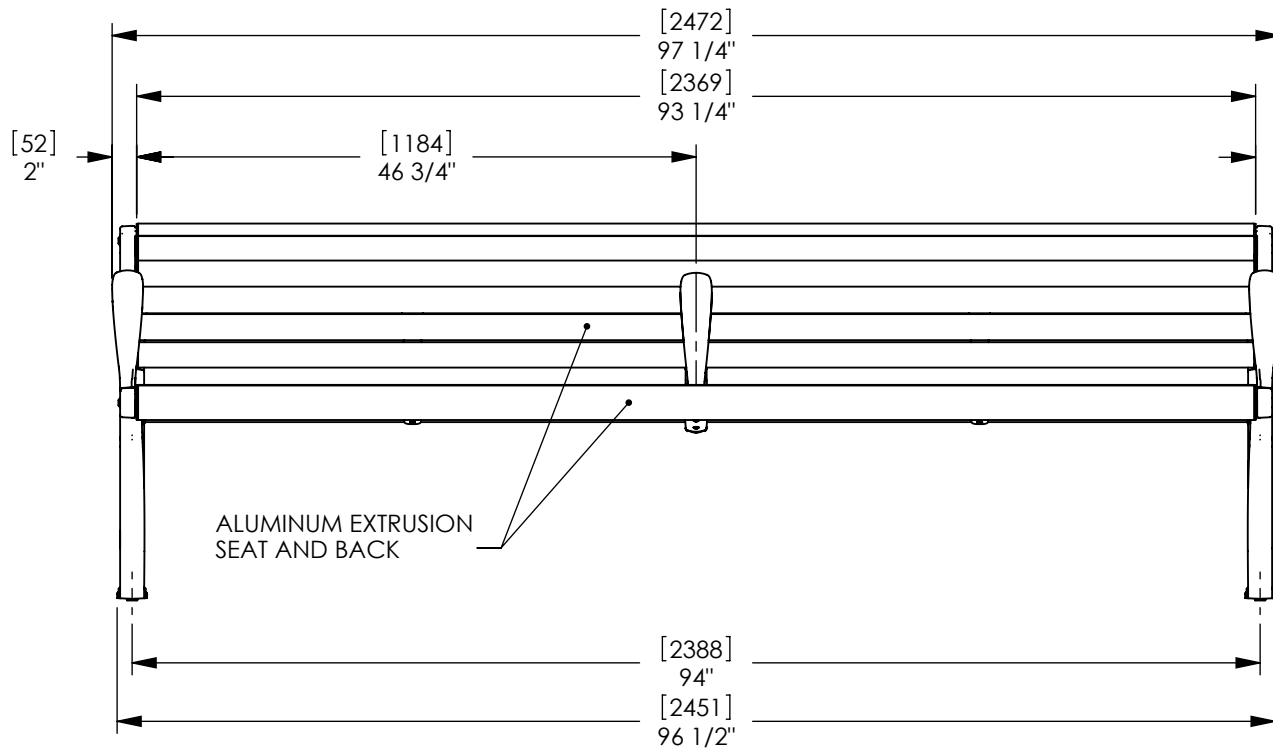




**VICTOR STANLEY, INC.®**  
*-Manufacturers of Quality Site Furnishings since 1962-*

P.O. DRAWER 330 - DUNKIRK, MD 20754 USA  
 TOLL FREE: (800) 368-2573 (USA & CANADA)  
 TEL (301) 855-8300 - FAX (410) 257-7579  
 WEB SITE: HTTP://WWW.VICTORSTANLEY.COM

\* ALL DIMENSIONS ARE IN INCHES \*

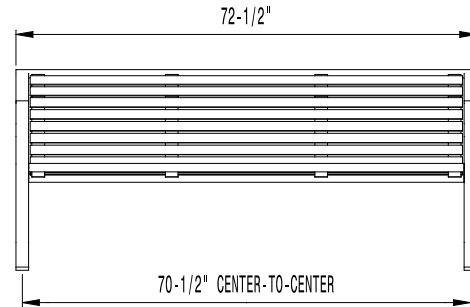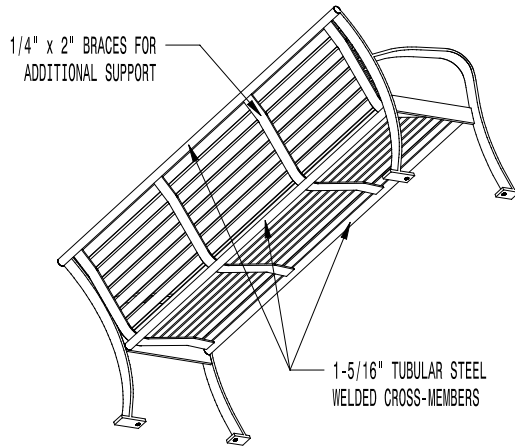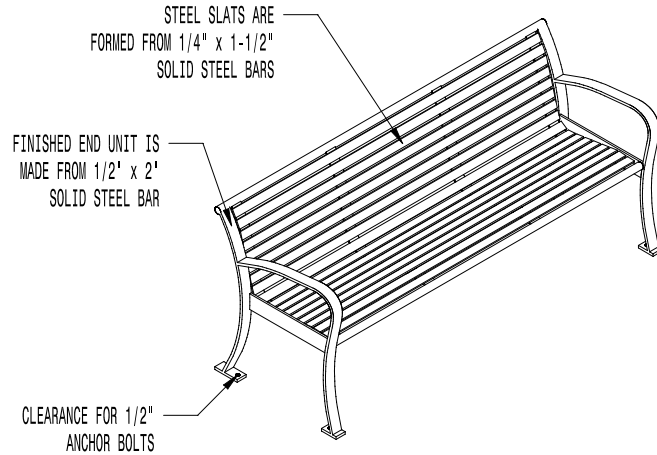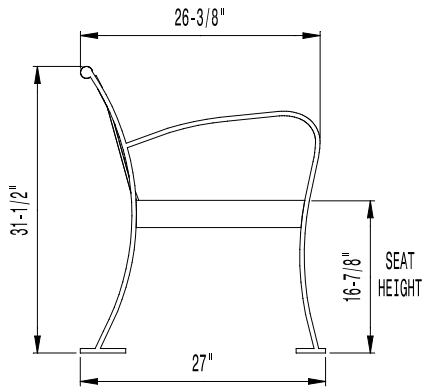

**AVAILABLE OPTIONS:**

**POWDER COATING**

10 STANDARD COLORS, 2 OPTIONAL METALLIC COLORS,  
 CUSTOM COLORS (INCLUDING THE RAL RANGE)

**INTERMEDIATE ARMRESTS (BOLT-ON)**


AVAILABLE WITH OPTIONAL ARMRESTS

**LENGTHS**

STANDARD 4'  
 STANDARD 6' (AS SHOWN)  
 STANDARD 8'

**NOTES:**

1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGES 8-10 MILS (200-250 MICRONS).
3. IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL BENCH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
5. FOR HIGH SALT ABUSIVE CLIMATES, HOT-DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. HOT-DIP GALVANIZING IS PERFORMED FOR VICTOR STANLEY, INC. BY AN EXPERIENCED QUALIFIED FIRM TO WHICH PRODUCTS ARE SHIPPED FOR GALVANIZING. HOT-DIP GALVANIZING INCLUDES AN AGGRESSIVE PRE-TREATMENT AND IMMERSION IN A TANK OF CHARGED LIQUID ZINC AT OR AROUND 860°F (460°C). THE RESULTING SURFACE IS RESISTANT TO RUST BUT HAS SOME UNEVENNESS RESULTING FROM THE BONDING OF THE ZINC TO THE STEEL SURFACE. AS A RESULT, THE POWDER-COATING SURFACE FINISH OVER THAT GALVANIZED SURFACE MAY EXHIBIT BUMPS, UNEVENNESS, AND MAY NOT BE AS SMOOTH AS THE STANDARD FINISH; THIS UNEVEN AND INCONSISTENT FINISH IS NORMAL FOR GALVANIZING. CONTACT MANUFACTURER FOR DETAILS.
6. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
7. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.



**RBF-28**

STEELSITES™ RB SERIES

ALL STEEL BENCH  
 SHOWN: STANDARD 6-FOOT LENGTH






Create a timeless moment.®

P.O. DRAWER 330 - DUNKIRK, MD 20754 USA  
 TOLL FREE: (800) 368-2573 (USA & CANADA)  
 TEL (301) 855-8300 - FAX (410) 257-7579  
 WEB SITE: HTTP://WWW.VICTORSTANLEY.COM

\* ALL DIMENSIONS ARE IN INCHES \*

THIS PRODUCT IS COVERED BY ONE OR MORE OF THE FOLLOWING  
 U.S. PATENTS D710,139 S ; D710,625

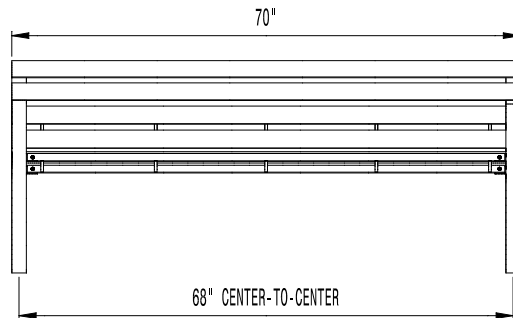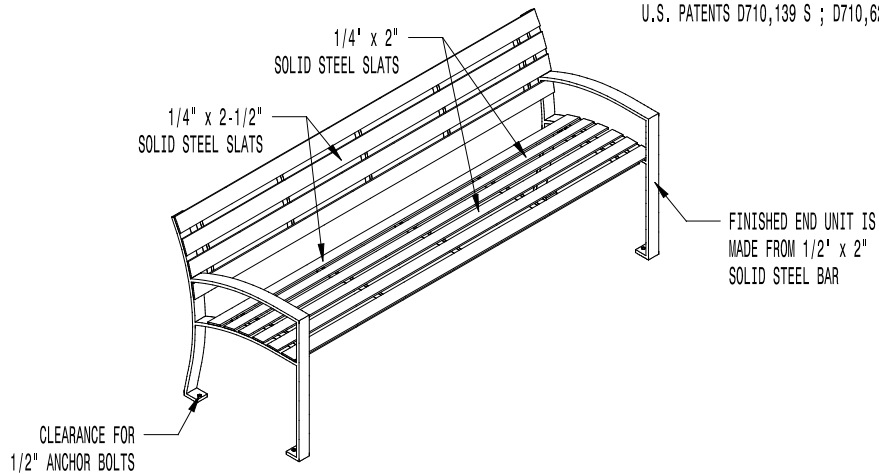

AVAILABLE OPTIONS:

POWDER COATING

10 STANDARD COLORS, 2 OPTIONAL METALLIC COLORS,  
 CUSTOM COLORS (INCLUDING THE RAL RANGE)

INTERMEDIATE ARMRESTS (BOLT-ON)

4', 6', & 8' AVAILABLE WITH OPTIONAL ARMRESTS

LENGTHS

STANDARD 4'  
 STANDARD 6' (AS SHOWN)  
 STANDARD 8'

MOUNTING

STANDARD SURFACE (AS SHOWN) AND IN-GROUND

NOTES:

- DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
- ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGES 8-10 MILS (200-250 MICRONS).
- IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL BENCH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
- ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
- FOR HIGH SALT ABUSIVE CLIMATES, HOT-DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. HOT-DIP GALVANIZING IS PERFORMED FOR VICTOR STANLEY, INC. BY AN EXPERIENCED QUALIFIED FIRM TO WHICH PRODUCTS ARE SHIPPED FOR GALVANIZING. HOT-DIP GALVANIZING INCLUDES AN AGGRESSIVE PRE-TREATMENT AND IMMERSION IN A TANK OF CHARGED LIQUID ZINC AT OR AROUND 860°F (460°C). THE RESULTING SURFACE IS RESISTANT TO RUST BUT HAS SOME UNEVENNESS RESULTING FROM THE BONDING OF THE ZINC TO THE STEEL SURFACE. AS A RESULT, THE POWDER-COATING SURFACE FINISH OVER THAT GALVANIZED SURFACE MAY EXHIBIT BUMPS, UNEVENNESS, AND MAY NOT BE AS SMOOTH AS THE STANDARD FINISH; THIS UNEVEN AND INCONSISTENT FINISH IS NORMAL FOR GALVANIZING. CONTACT MANUFACTURER FOR DETAILS.
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
- THIS PRODUCT IS SHIPPED PARTIALLY UNASSEMBLED.



EVA BACKED BENCH WITH STEEL SLATS  
 SHOWN: STANDARD 6-FOOT LENGTH  
 STANDARD SURFACE MOUNT